
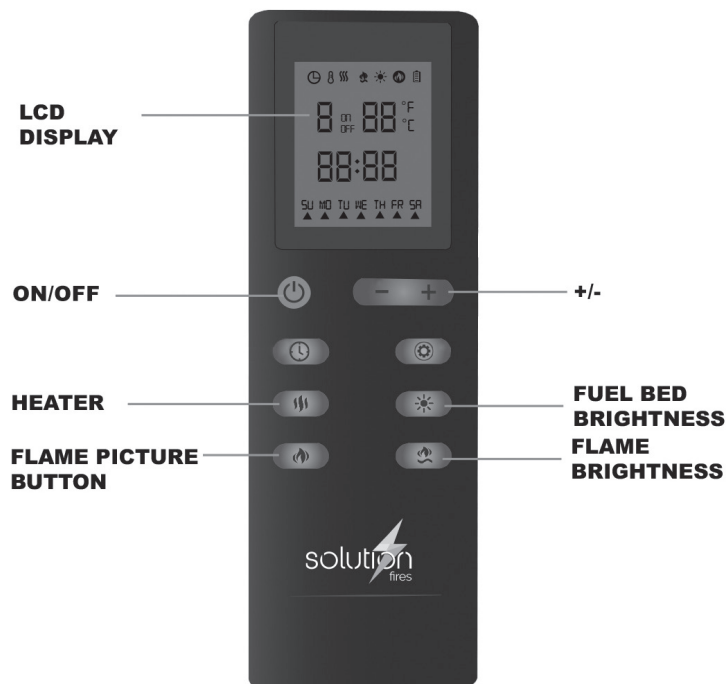








Electronic Remote Control Quick Start Guide

- **Ensure power ON/OFF switch located under left hand side of the canopy on the fire is switched to on.**
- **NOTE:** The remote control handset uses an Infra-Red beam (not a radio frequency) and therefore must be directly pointed at the centre of the appliance.
- **TURNING FIRE ON/OFF** - Press the coloured  button to switch the fire on and off. This fire is designed to slowly fade down when turned off, please allow a couple of seconds for this to happen.
- **NOTE:** If you have turned the fire off using the manual switch on the fire the handset will not recognise this has happened and will think that the fire is still on. You can see this has happened if the fire is off but the display on the handset is still illuminated. In this instance pressing the on/off button on the handset will turn the handset off and then pressing the on/off button again will turn fire & handset back on.



- **NOTE: Handset Sleep Mode** – After about 25 seconds the handset will go into sleep mode to save battery life. To reactivate handset press any button (except on/off) THEN press your desired control buttons.
-  **Heater** – Heat 2kW (**H2**) / Heat 1kW (**H1**) Heat off (**H0**). The fan will continue to run for approx 10 seconds after turning off to get rid of any residual heat in the fire.
- **NOTE:** Should the fan heater not come on or switches off after a period of time, check that the target temperature +/- is set high enough.
-  **Flame Picture** – Front & rear fuel bed & flames / Front fuel bed & flames / No flames / No illumination
-  **Flame Brightness** – High / Medium / Low
-  **Fuel Bed Brightness** – High / Medium / Low



Common User Errors

- Power On/Off switch not on.
- User isn't pointing handset at fire.
- User presses 'power off' button but doesn't point handset at fire.
- Remote screen goes off but fire will stay on.
- User needs to press power again - turning handset back on.
- Repeat the process pointing remote at fire.
- User presses 'flame picture button' until "no illumination" setting.
- Consumer may think the fire is now off.
- Pressing the on/off button will be turning the fire on/off but as the illumination is turned off the user will not know.
- Ensure handset is illuminated and press "flame picture button".